

4e PETROLEUMHAVEN

LOA - 350m

ST.103


CALAND KANAAL

NOTES:

- MAX. 1 LINE PER QUICK RELEASE HOOK
- NO MORE THAN 2 LINES PER BOLLARD
- MINIMUM MOORING REQUIREMENTS:
 - SHIPS < 10,000 DWT: 2 HEAD- AND STERNLINES, 2 SPRINGLINES FWD AND AFT
 - SHIPS < 25,000 DWT: 3 HEAD- AND STERNLINES, 2 SPRINGLINES FWD AND AFT
 - SHIPS > 25,000 DWT: 4 HEAD- AND STERNLINES, 2 SPRINGLINES FWD AND AFT

**MOORING PLAN JETTY 103
350,000 DWT VESSEL**

BOLLARD	BOLLARD CAPACITY	TYPE LINE
B6	2x 100 ton	BOWLINE
B5	2x 100 ton	BOWLINE
B8	2x 100 ton	BOWLINE
B4	2x 100 ton	
D4	2x 100 ton	
D3	2x 100 ton	
D2	2x 100 ton	
D1	2x 100 ton	
B3	2x 100 ton	
B7	2x 100 ton	STERNLINE
B2	2x 100 ton	STERNLINE
B1	2x 100 ton	STERNLINE

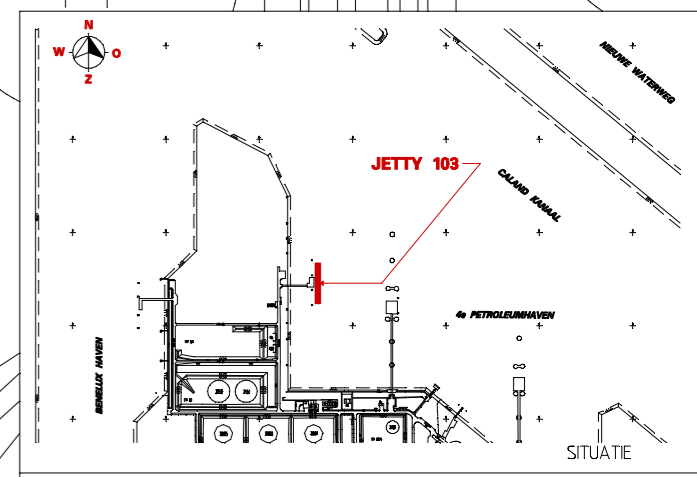

rev.	date	description	author	appr.
A	01-08-2016	OPNIEUW GETEKEND	DMS	746
for symbols and identifications system		PC -	date	FROM
OP 31803/0 CEN. mechanical		plant	sheet number	
OP 31803/0 CEN. instrumentation		unit	SCALE	
OP 31803/0 CEN. electrical		unit	RELI-REUZ	scale: TS
			REG. NR.	
MOORING PLAN JETTY 103 FOR VESSELS OF 350m LENGTH				
reference	drawing	R-0535235	sheet	1 of 1
drawing			R 0866327	REVISE
drawing				A
Shell Nederland Raff./Chemie b.v. H:/M: _____ H:/M: _____ H:/M: _____				

