

A


B

C

D

E

F

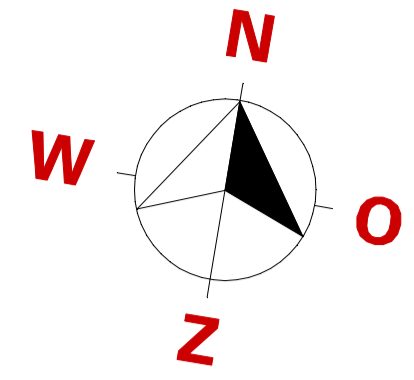

NOTES:

- NO MIXED MOORING
- NO MORE THAN 2 LINES PER BOLLARD
- MINIMUM MOORING REQUIREMENTS:
 - SHIPS < 10,000 DWT: 2 HEAD- AND STERNLINES, 2 SPRINGLINES FWD AND AFT
 - SHIPS < 25,000 DWT: 3 HEAD- AND STERNLINES, 2 SPRINGLINES FWD AND AFT
 - SHIPS > 25,000 DWT: 4 HEAD- AND STERNLINES, 2 SPRINGLINES FWD AND AFT

**MOORING PLAN JETTY 35A
<10,000 SDWT VESSELS**


BOLLARD	BOLLARD CAPACITY	TYPE LINE
35A-B03	500 kN	
35A-B05	500 kN	
35A-B06	500 kN	
35A-B07	600 kN	STERNLINE
35A-B08	1000 kN	
35A-B09-B11	1000 kN	
35A-B12-B21	500 kN	
35A-B22-B31	300 kN	

**TWEEDE
PETROLEUMHAVEN**

LOA - 100m

JETTY 35A

LICHTERHAVEN

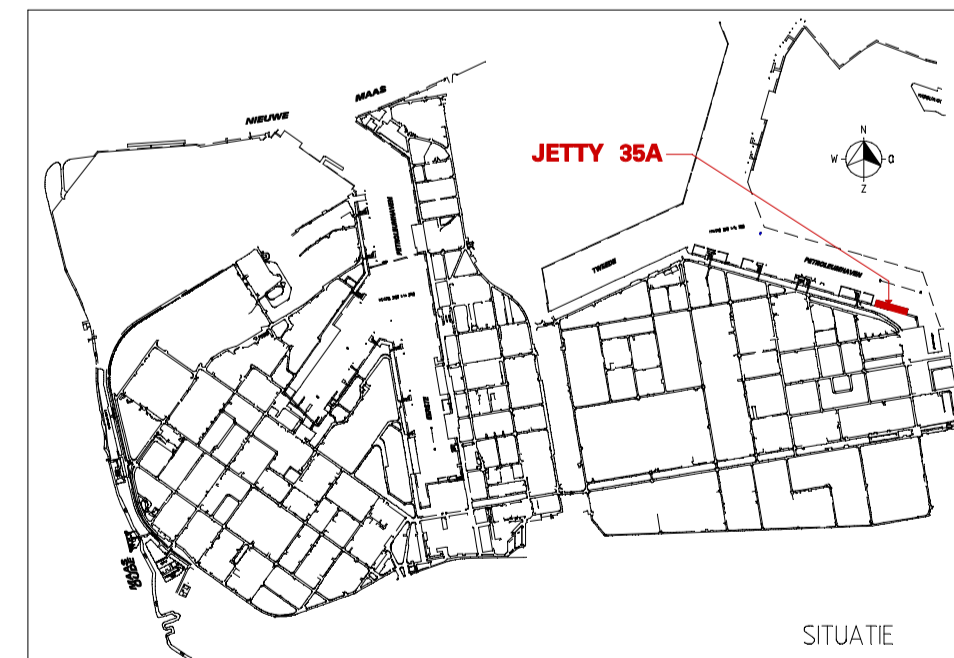

SITUATIE

REV.	DATE	DESCRIPTION	BY	APP.
F	12-07-2018	NEUWE LOCATIE EN CAPACITEIT BOLLARD 35A-B07	DMYS	746
E	01-08-2016	OPNIEUW GETEKEND	DMYS	746


MOORING PLAN JETTY 35A
FOR VESSELS OF 100m LENGTH

reference: drawing: R-0415000

sheet: 1 of 1

SCALE: A1

Shell Nederland Raff./Chemie b.v.



A

B

C

D

E

3