


**MOORING PLAN JETTY 3
< 25,000 SDWT VESSELS**

BOLLARD	BOLLARD CAPACITY	TYPE LINE
2-B07	550 kN	BOWLINE
2-B08	550 kN	BOWLINE
3-B01	550 kN	BOWLINE
3-B02	550 kN	BOWLINE
3-B03	550 kN	STERNLINE
3-B04	550 kN	STERNLINE
3B10-B13	600 kN	SPRINGLINE
3B14-B19	800 kN	SPRINGLINE
3-B20-25	600 kN	SPRINGLINE
3-B26-19	600 kN	SPRINGLINE
4-B01	550 kN	STERNLINE
4-B02	550 kN	STERNLINE

NOTES:

- NO MIXED MOORING
- NO MORE THAN 2 LINES PER BOLLARD
- MINIMUM MOORING REQUIREMENTS:
 - SHIPS < 10,000 DWT: 2 HEAD- AND STERNLINES, 2 SPRINGLINES FWD AND AFT
 - SHIPS < 25,000 DWT: 3 HEAD- AND STERNLINES, 2 SPRINGLINES FWD AND AFT
 - SHIPS > 25,000 DWT: 4 HEAD- AND STERNLINES, 2 SPRINGLINES FWD AND AFT

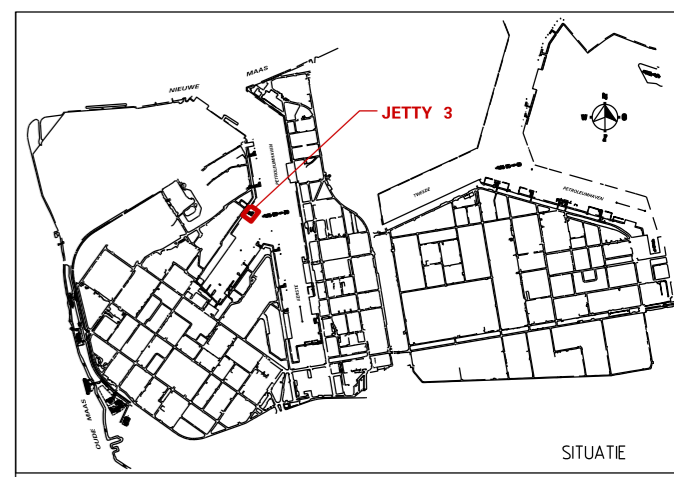

rev.	date	description	by	app.
		B 02-11-21 UPDATE VERWERKT	DMS	748
		A 02-05-12 FIRST ISSUE	DMS	73131
for symbols and specifications systems		PE	scale	ROOM
DEP 3180310 GEN. mechanical		plant	SCALE	1500
DEP 3180310 GEN. instrumentation		inst	SCALE	7001
DEP 3180310 GEN. electrical		var	A01%-G01	scale 15
		REG. NR.		
MOORING PLAN T.B.V SCHEPEN TOT 155m LENGTE STEIGER 3				
reference	drawing	R-0415000	SHEET 1	of 1
			0809036	REVISE
			B	
Shell Nederland Raff./Chemie b.v.				

