

**NOTES:**

- NO MIXED MOORING
- NO MORE THAN 2 LINES PER BOLLARD
- MINIMUM MOORING REQUIREMENTS:
  - SHIPS < 10,000 DWT: 2 HEAD- AND STERNLINES, 2 SPRINGLINES FWD AND AFT
  - SHIPS < 25,000 DWT: 3 HEAD- AND STERNLINES, 2 SPRINGLINES FWD AND AFT
  - SHIPS > 25,000 DWT: 4 HEAD- AND STERNLINES, 2 SPRINGLINES FWD AND AFT

**MOORING PLAN JETTY 17  
> 25,000 SDWT VESSELS**


BOLLARD	BOLLARD CAPACITY	TYPE LINE
17-B01	1000 kN	BOWLINE
17-B02	1000 kN	BOWLINE
17-B03	1000 kN	BOWLINE
17-B04 f/m B10	500 kN	
17-B11 f/m B17	300 kN	
17-B18	500 kN	SPRINGLINE
17-B19	500 kN	SPRINGLINE
17-B20	500 kN	SPRINGLINE
17-B21	500 kN	STERNLINE
17-B22	500 kN	STERNLINE
17-B23	500 kN	
17-B24	400 kN	BOWLINE
18-B01	500 kN	BOWLINE
18-B02	500 kN	BOWLINE
18-B03	500 kN	BOWLINE

**EERSTE PETROLEUMHAVEN**

LOA - 190m

JETTY 17

JETTY 18

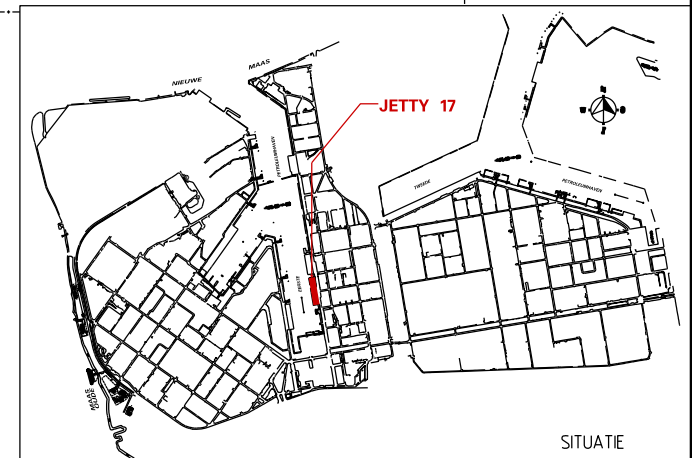

SITUATE

REV	DATE	DESCRIPTION	BY	APP
F	15-02-2022	NEW BOLLARD 17.B24	DMS	74.8
E	02-12-2019	NEW BOLLARD 17.B23	DMS	74.6
D	01-08-2016	OPNIEUW GETEKEND	DMS	74.6

**MOORING PLAN JETTY 17  
FOR VESSELS OF 190m LENGTH**

reference: drawing R-0415000 SHEET 1 of 1

drawing: **R 0721962** F

Shell Nederland Raff./Chemie b.v.