


MOORING PLAN JETTY 3
10 - 25,000 SDWT VESSELS

BOLLARD	BOLLARD CAPACITY	TYPE LINE
2-B07	550 kN	BOWLINE
2-B08	550 kN	BOWLINE
3-B01	550 kN	BOWLINE
3-B02	550 kN	BOWLINE
3-B03	550 kN	STERNLINE
3-B04	550 kN	STERNLINE
3B10-B13	600 kN	SPRINGLINE
3B14-B19	800 kN	SPRINGLINE
3B20-25	600 kN	SPRINGLINE
3B26-19	600 kN	SPRINGLINE
4-B01	550 kN	STERNLINE
4-B02	550 kN	STERNLINE

NOTES:

- NO MIXED MOORING
- NO MORE THAN 2 LINES PER BOLLARD
- MINIMUM MOORING REQUIREMENTS:
 - SHIPS < 10,000 DWT: 2 HEAD- AND STERNLINES, 2 SPRINGLINES FWD AND AFT
 - SHIPS < 25,000 DWT: 3 HEAD- AND STERNLINES, 2 SPRINGLINES FWD AND AFT
 - SHIPS > 25,000 DWT: 4 HEAD- AND STERNLINES, 2 SPRINGLINES FWD AND AFT

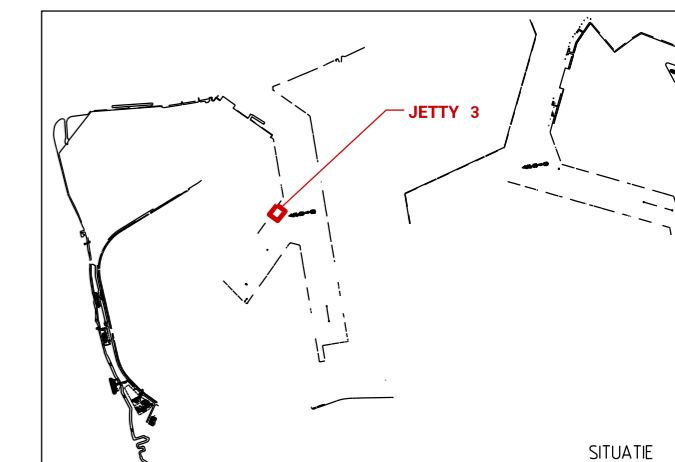

rev. date description bureau AFD

B 02-11-21 UPDATE VERWERKT DMS 748
A 02-05-12 FIRST ISSUE DMS 73131

REV.	DATE	DESCRIPTION	BUREAU	AFD

for symbols and identifications systems: DE - 3180310 GEN. mechanical, DEP 3180310 GEN. instrumentation, DEP 3180310 GEN. electrical

SCALE 1:500

MOORING PLAN
T.B.V SCHEPEN TOT 120m LENGTE
STEIGER 3

reference: drawing R-0415000 SHEET 1 of 1 REVISION

drawing: **R0809035** **B**

Shell Nederland Raff./Chemie b.v.

