

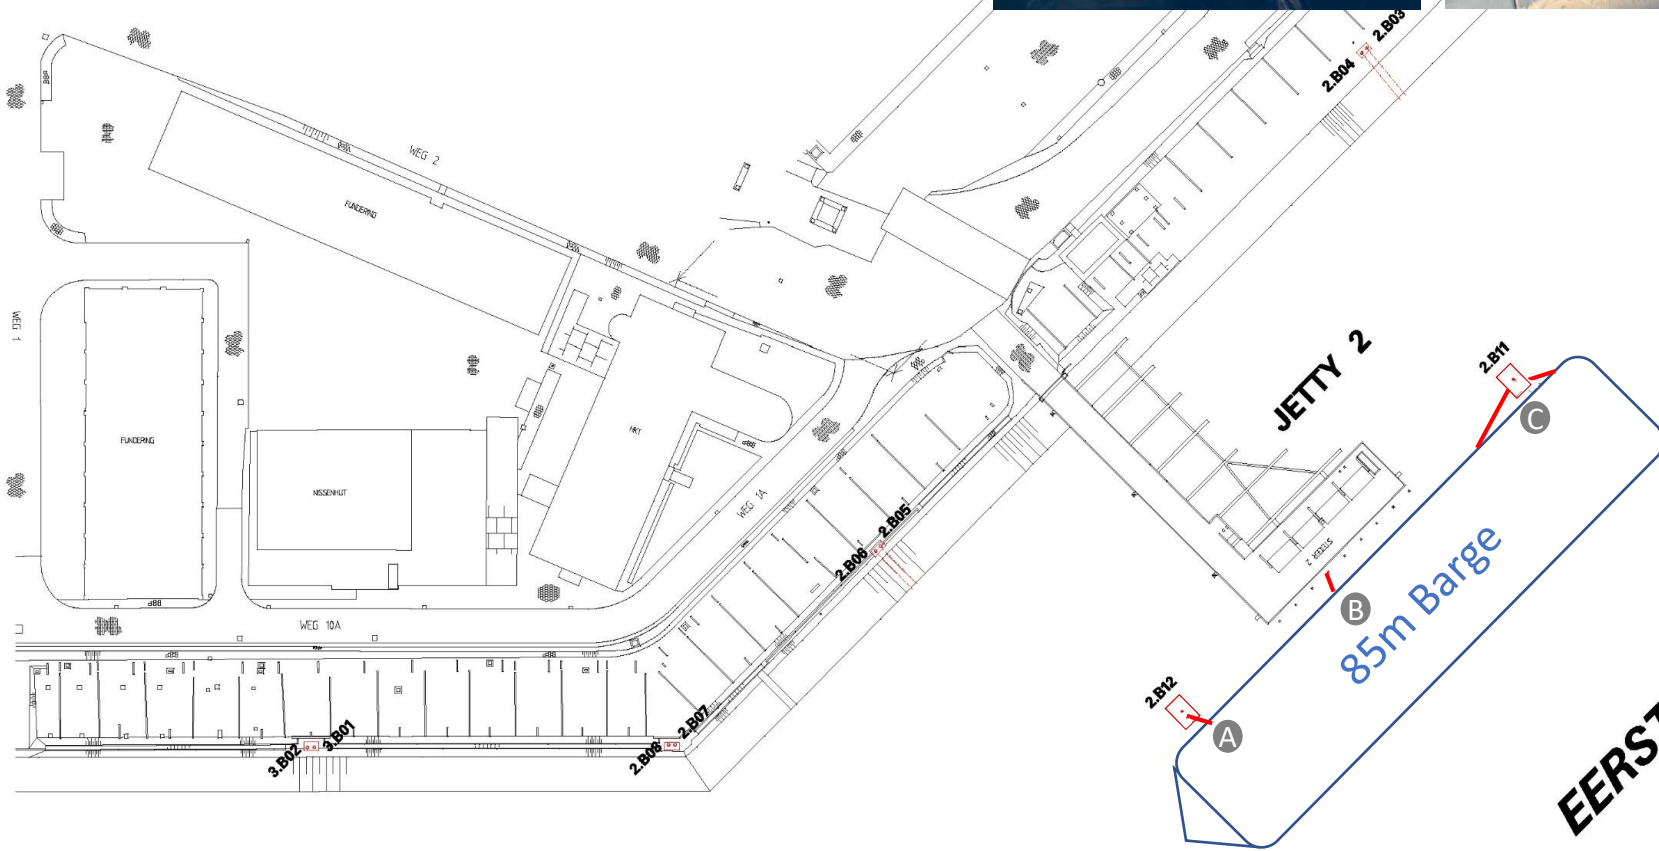
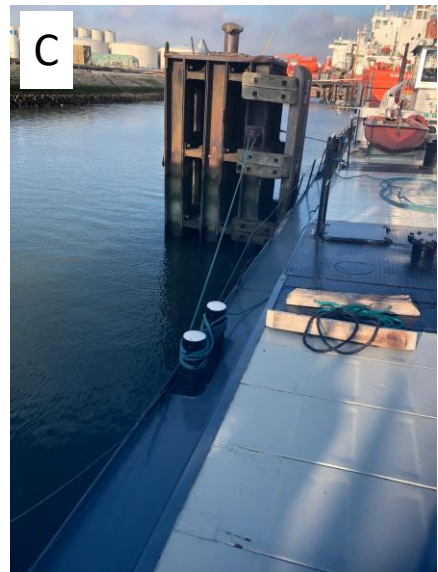


**MOORING PLAN JETTY 2  
<10,000 SDWT VESSELS**

BOLLARD	BOLLARD CAPACITY	TYPE LINE
2-B01	550 kN	
2-B02	550 kN	
2-B03	550 kN	BOWLINE
2-B04	550 kN	BOWLINE
2-B05	550 kN	STERNLINE
2-B06	550 kN	STERNLINE
2-B07	550 kN	
2-B08	550 kN	
2-B11	1000 kN	SPRINGLINE
2-B12	1000 kN	SPRINGLINE
3-B01	550 kN	
3-B02	550 kN	

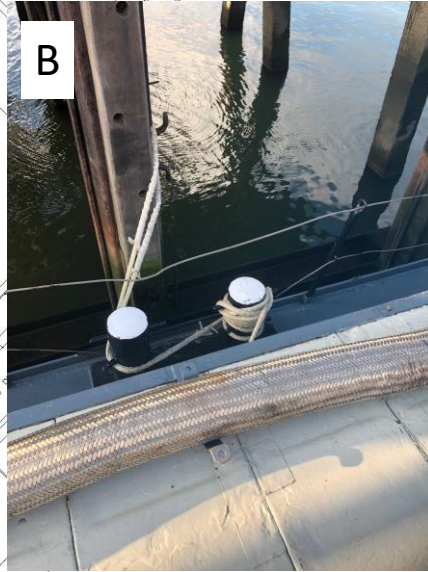

**EERSTE PETROLEUMHAVEN**

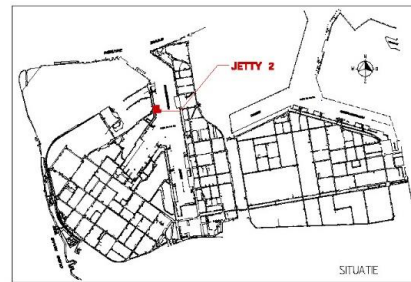

**Bitumen Barge (85m)  
Mooring Plan  
Shell Pernis - Jetty 2  
03-12-19**

- NOTES:**
- NO MIXED MOORING
  - NO MORE THAN 2 LINES PER BOLLARD
  - MINIMUM MOORING REQUIREMENTS:
    - SHIPS < 10,000 DWT: 2 HEAD- AND STERNLINES, 2 SPRINGLINES FWD AND AFT
    - SHIPS < 25,000 DWT: 3 HEAD- AND STERNLINES, 2 SPRINGLINES FWD AND AFT
    - SHIPS > 25,000 DWT: 4 HEAD- AND STERNLINES, 2 SPRINGLINES FWD AND AFT

