

**MOORING PLAN JETTY 17
< 10,000 SDWT VESSELS**

BOLLARD	BOLLARD CAPACITY	TYPE LINE
17-B01	1000 kN	BOWLINE
17-B02	1000 kN	BOWLINE
17-B03	1000 kN	BOWLINE
17-B04 t/m B10	500 kN	
17-B11 t/m B17	300 kN	
17-B18	500 kN	SPRINGLINE
17-B19	500 kN	SPRINGLINE
17-B20	500 kN	SPRINGLINE
17-B21	500 kN	STERNLINE
17-B22	500 kN	STERNLINE
17-B23	500 kN	
17-B24	400 kN	BOWLINE
18-B01	500 kN	BOWLINE
18-B02	500 kN	BOWLINE
18-B03	500 kN	BOWLINE


- NOTES:**
- NO MIXED MOORING
 - NO MORE THAN 2 LINES PER BOLLARD
 - MINIMUM MOORING REQUIREMENTS:
 - SHIPS < 10,000 DWT: 2 HEAD- AND STERNLINES, 2 SPRINGLINES FWD AND AFT
 - SHIPS < 25,000 DWT: 3 HEAD- AND STERNLINES, 2 SPRINGLINES FWD AND AFT
 - SHIPS > 25,000 DWT: 4 HEAD- AND STERNLINES, 2 SPRINGLINES FWD AND AFT

EERSTE PETROLEUMHAVEN

LOA - 100m

JETTY 17

JETTY 18

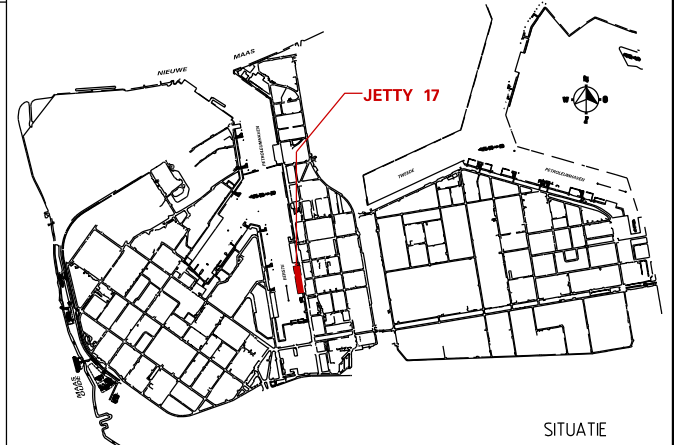

Rev.	date	description	drawn	APD
F	15-02-2022	NEW BOLLARD 17B24	DMS	748
E	02-12-2019	NEW BOLLARD 17B23	DMS	746
D	01-08-2016	OPNIEUW GETEKEND	DMS	746

**MOORING PLAN JETTY 17
FOR VESSELS OF 100m LENGTH**

Reference: drawing R-0415000 SHEET 1 of 1 REVISION R 0721960 F

Shell Nederland Raff./Chemie b.v.

